

## 26 gauge PBR XT-40S Colors

White

SRI 82

Parchment

SRI 72

Light Stone

SRI 62

Hickory

SRI 54

Sage Green

SRI 41

Forest Green



SRI 29

Hunter Green

SRI 29

Galvalume

NO SRI

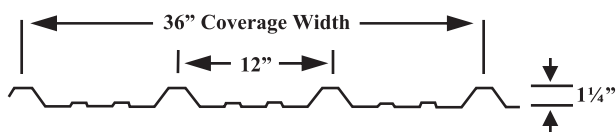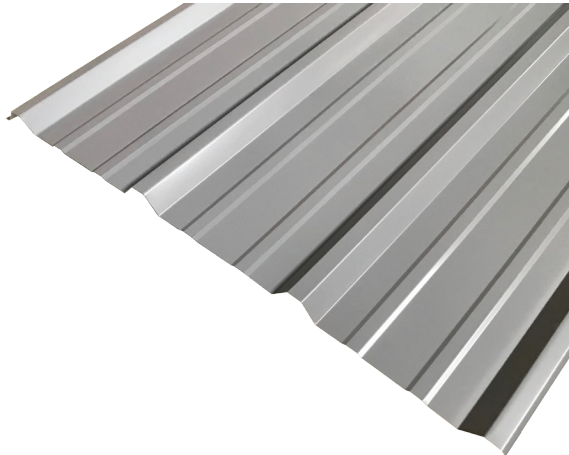

SRI 34

Dark Blue

SRI 29

Tahoe Blue

SRI 47

Gray

SRI 29

Charcoal

SRI 35

Coco Brown

SRI 30

Weathered Copper

SRI 29

Dark Brown

SRI 37

Dark Red

Colors listed above are intended to be close representations.  
Actual color chips are available upon request.  
Please verify color, gauge, and profile availability. See back page for details.  
Contact us for other color choices and their associated lead-times.

### QUALITY MAKES A DIFFERENCE

We are dedicated to providing the highest quality material. All of our steel is subject to strict quality control which means that our customers can depend on their investment for years.


## CoolPaint TECHNOLOGY™

- 40 year warranty on paint film integrity
- Reflects a minimum of 25% of the sun's rays
- Superior resistance to chalking and fading
- Creates cooler interiors (1% of reflected sunlight translates into a 1° reduction in heat allowed into the structure)
- Easy installation in the heat of the day
- Helps to prevent oil canning
- Rebates may be available from the Federal government or local energy companies



*Steel and paint sources may vary, but all warrantied material utilizes cool paint technology.*

1. ASTM A792/A792M-08, Grade "E" 80,000 psi steel.
2. Zinc/Aluminum or G60 Zinc coating  
Clear resin coating added on all bare products.
3. Pre-treated film provides superior adhesion of the primer.
4. Urethane primer provides additional corrosion protection as well as ensuring permanent bonding of the finish coat.
5. Siliconized polyester finish coat adds fade-resistant color and long-lasting protection.

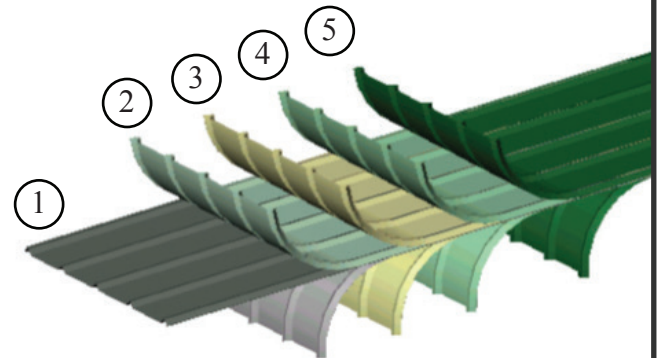

*\*Trapped moisture in the stacks of painted material may cause delamination of the painted surface or hasten deterioration of the painted finish. If panels arrive wet or become wet at the jobsite, open the bundle and allow them to dry completely.*