

AG / RESIDENTIAL

EXPOSED
FASTENERS

36" COVERAGE

MINIMUM SLOPE
3:12

OPEN FRAMING/
SOLID SUBSTRATE


PANEL DESCRIPTION

- Applications: Agricultural, Light Industrial, and Residential
- Limited 40-year warrantied paint
- Finishes 29 ga: 19 standard SMP colors and Galvalume®
- Finishes 26 ga: 10 standard SMP colors and Galvalume®
- Corrosion Protection on Substrate:
 - AZ-50 (ASTM A792) for painted Galvalume®
 - AZ-55 (ASTM A792) for unpainted, acrylic coated, Galvalume®
 - G-60 (ASTM A653) for painted Galvanized
- Sheet lengths: 1' to 50'-0" in one inch increments
- Polycarbonate and fiberglass light panels available in Delta Rib III profile
- For color availability, cool roof specs, and other panel info, please see our website: www.metallionindustries.com

TESTING DATA



- UL 2218 Impact Resistance
- UL 790, 263 Fire Resistance
- UL 580 Uplift Resistance

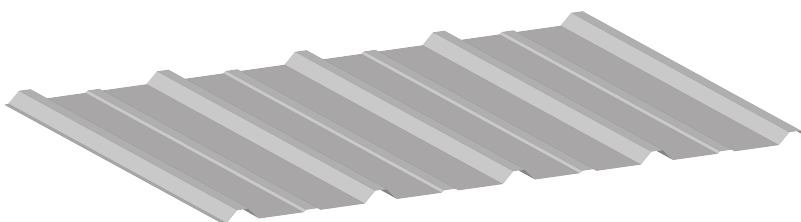

FASTENER INFORMATION

Panel Fastening:


Fasten Panel to Wood with #10-15 Sharp Point Screw

Fasten Panel to Steel with #12-14 Drill-Tip Screw


Screw thread should protrude no less than
1/4" through the underlayment.

PANEL FASTENING

Field of Panel

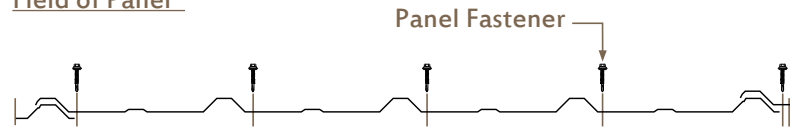

Ends of Panel

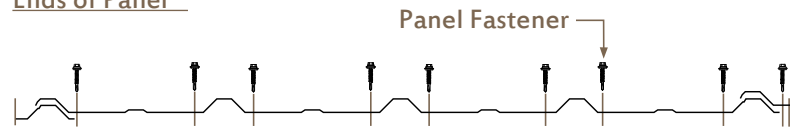

DELTA RIB III PROPERTIES					DELTA RIB III STANDARD FINISHES	
Ga	Coverage	Substrate Thickness (in)	Tensile (ksi)	Weight (lbs/ft ²)	Substrate coating	Paint System
29	36"	.0142" min	80	0.71 (about)	AZ50 or G60	Dura Coat Ceranamel™ Hybrid, or similar